

80KA FOR 1 SECOND

AVAILABLE THE FOLLOWING RATINGS


1600A
2500A

100KA FOR 1 SECOND

AVAILABLE THE FOLLOWING RATINGS

3200A
4000A
5000A
6300A

FULLY COMPLIANT WITH
BS EN 61439-2
(IEC 61439-2)

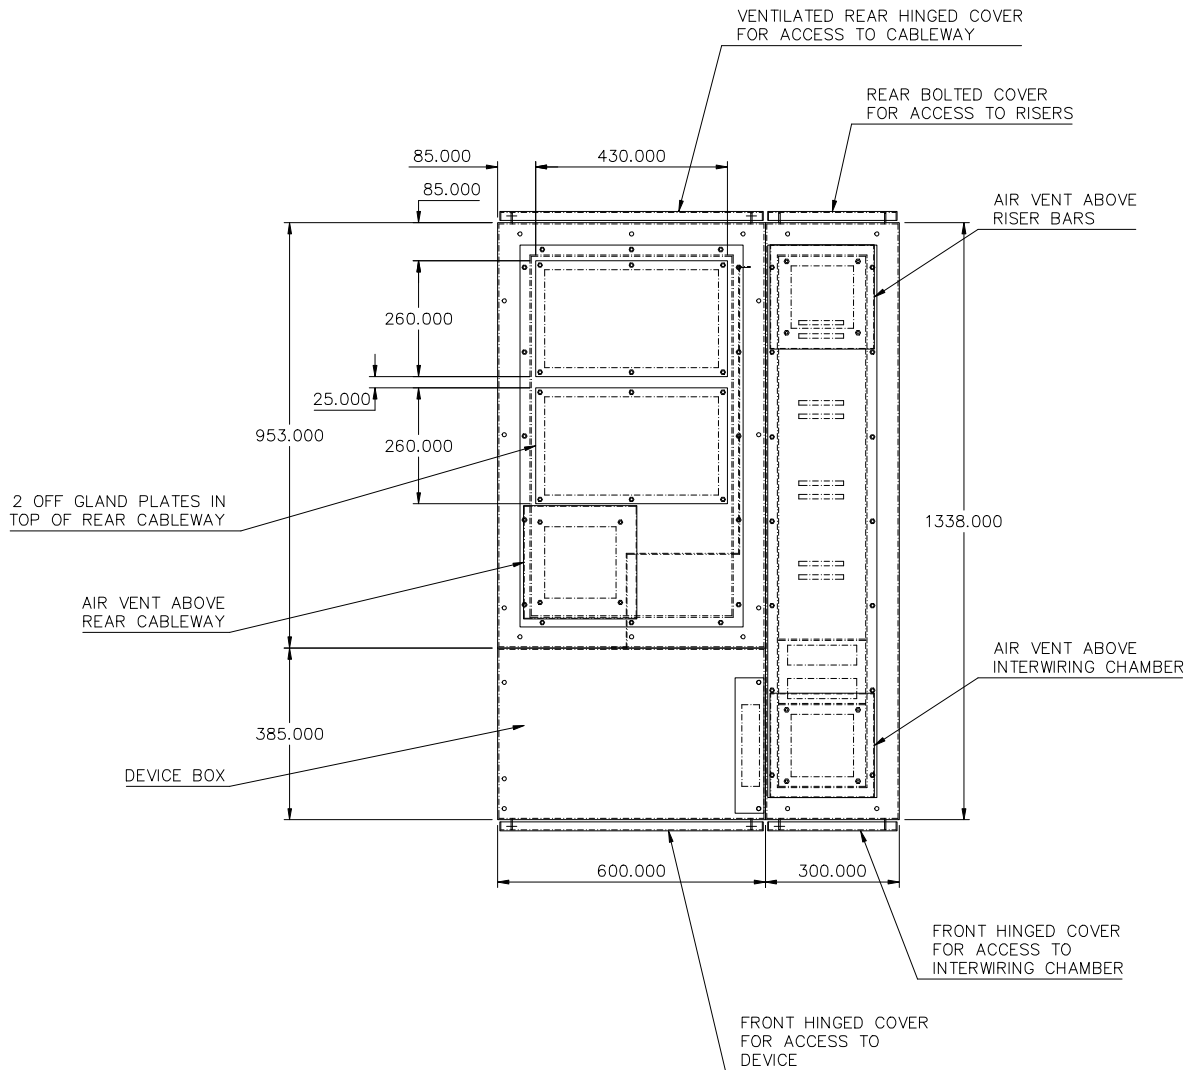

TOP REAR CABLING (SHOWN AS AN EXAMPLE ONLY)