

**SPECIFICATION**

EN60439-1:1994  
 MATERIAL: ZINTEC SHEET STEEL TO BS EN 10152:1994  
 SEGREGATION: FORM 4  
 INGRESS PROTECTION: I.P. 54  
 CONSTRUCTION: WELDED OUTER FRAME UNITS, DISHED COVERS & DOORS WITH FULLY WELDED CORNERS & EARTH STUD.  
 COMPARTMENTS: INTERCHANGEABLE INSERTS WHITE INSIDE OR AS EXTERNAL COLOUR  
 PLINTH: ROLLED STEEL CHANNEL  
 PAINT FINISH: ANY STOCK BS4800 OR RAL SEMI GLOSS

**KATTA™**


NEW DESIGN INNOVATION FEATURES:

- ① EXTRA DEPTH CABLEWAY
- ② VERTICAL CONTROL INTER WIRING STEEL TRUNKING
- ③ HORIZONTAL TRUNKING MOUNTING FACILITY
- ④ INTEGRATED EARTH BONDING FACILITY FOR INSERT COMPARTMENTS WITH EARTH DROPPER BUSBAR
- ⑤ 'L' PROFILE CHASSIS

**BACK-TO-BACK APPLICATION PROFILE**

CABLE ACCESS: DOUBLE FRONT  
 CABLE ENTRY: TOP OR BOTTOM  
 STARTER TYPE: FIXED PATTERN  
 SHARED DROPPERS: YES

TYPE 1 & TYPE 2 UNITS SHOWN USED AS A COMPLIMENTARY PAIR, MINIMIZING OVERALL SUITE LENGTH. FOR MORE ARDUOUS CABLING REQUIREMENTS, OMIT TYPE 2 UNITS (DROPPER BUSBARS CAN STILL BE SHARED).

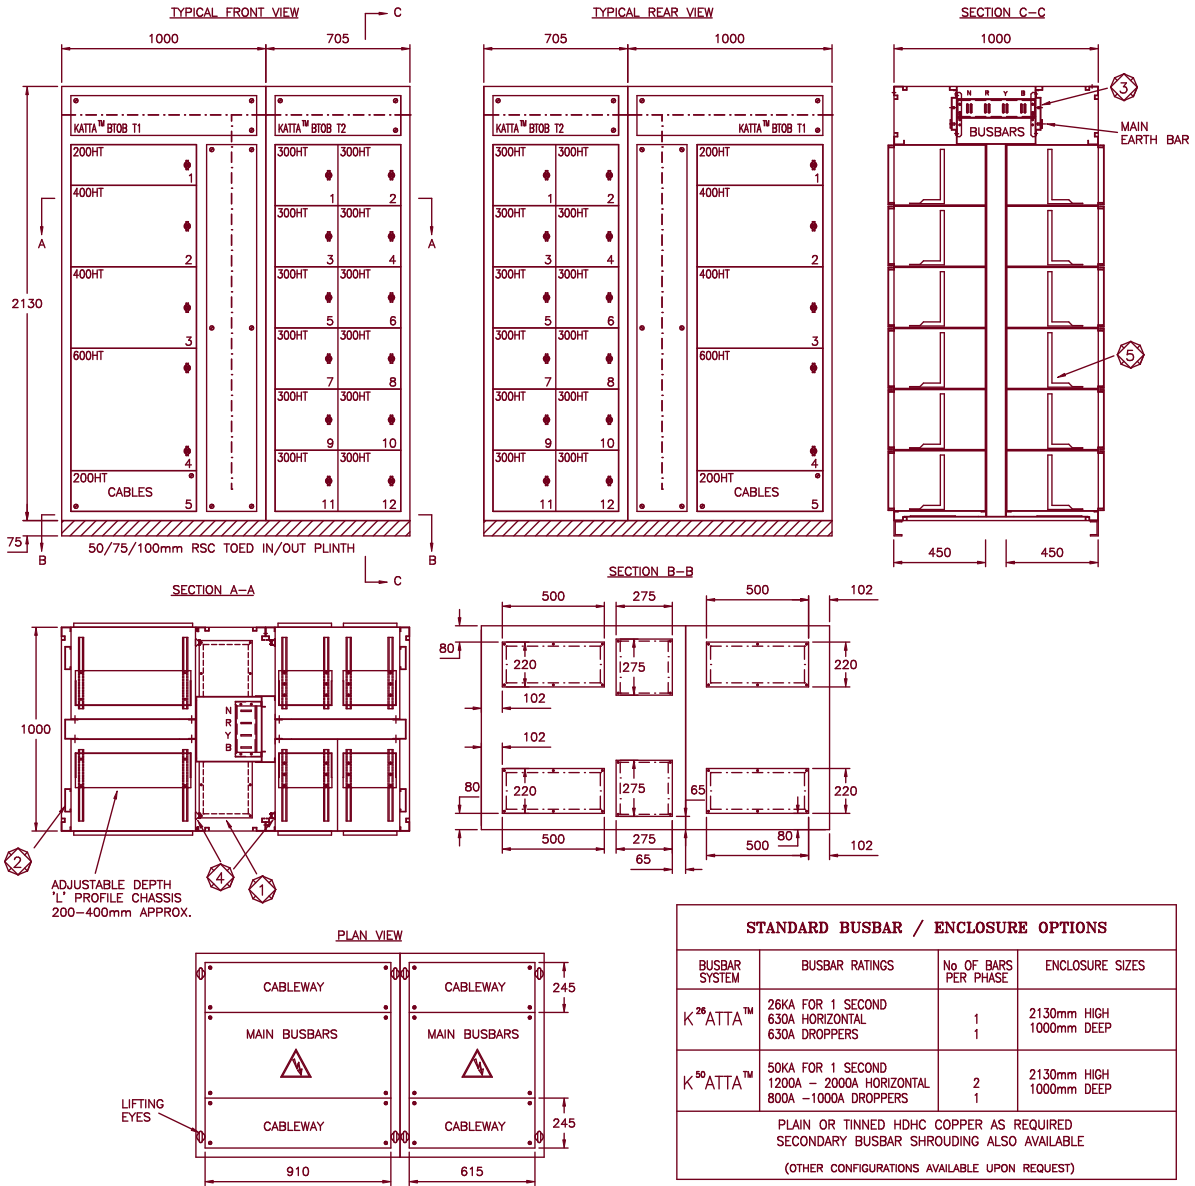

STANDARD BUSBAR / ENCLOSURE OPTIONS			
BUSBAR SYSTEM	BUSBAR RATINGS	No OF BARS PER PHASE	ENCLOSURE SIZES
K <sup>26</sup> ATTA™	26KA FOR 1 SECOND	1	2130mm HIGH 1000mm DEEP
	630A HORIZONTAL 630A DROPPERS		
K <sup>50</sup> ATTA™	50KA FOR 1 SECOND	2	2130mm HIGH 1000mm DEEP
	1200A - 2000A HORIZONTAL 800A - 1000A DROPPERS		
PLAIN OR TINNED HDHC COPPER AS REQUIRED SECONDARY BUSBAR SHROUding ALSO AVAILABLE (OTHER CONFIGURATIONS AVAILABLE UPON REQUEST)			

**Rolla**

Atlas Mill Road, Brighouse  
 West Yorkshire, England, HD6 1ET  
 Telephone: (01484) 710226  
 Fax: (01484) 718608  
 Email - sales@rolla.co.uk  
 Website - www.rolla.co.uk



**TITLE**

BACK - TO - BACK  
 FIXED PATTERN  
 MCC DATA SHEET

DRAWN	DATE	DRAWING NUMBER
ML	MAY 2002	KATTA 008