

COMPATIBLE UNIT APPLICATION PROFILE

CABLE ACCESS: FRONT/REAR
 CABLE ENTRY: TOP OR BOTTOM
 STARTER TYPE: FIXED PATTERN
 SHARED DROPPERS: NO DROPPERS

STANDARD SIZES


600mm WIDE	SINGLE DOOR
705mm WIDE	SINGLE DOOR
800mm WIDE	SINGLE DOOR
1000mm WIDE	SINGLE DOOR
1200mm WIDE	DOUBLE DOOR
1400mm WIDE	DOUBLE DOOR
1600mm WIDE	DOUBLE DOOR
1800mm WIDE	DOUBLE DOOR
2000mm WIDE	DOUBLE DOOR

STANDARD BUSBAR / ENCLOSURE OPTIONS


BUSBAR SYSTEM	BUSBAR RATINGS	No OF BARS PER PHASE	ENCLOSURE SIZES
K ²⁶ ATTA™	26KA FOR 1 SECOND 630A HORIZONTAL	1	2130mm HIGH 665/800mm DEEP
K ⁵⁰ ATTA™	50KA FOR 1 SECOND 1200A - 2000A HORIZONTAL	2	2130mm HIGH 665/800mm DEEP

PLAIN OR TINNED HDHC COPPER AS REQUIRED
 SECONDARY BUSBAR SHROUding ALSO AVAILABLE
 (OTHER CONFIGURATIONS AVAILABLE UPON REQUEST)


TYPICAL FRONT VIEW
(SINGLE DOOR TYPE)

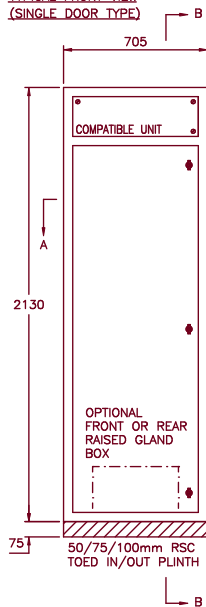


TYPICAL FRONT VIEW
(DOUBLE DOOR TYPE)

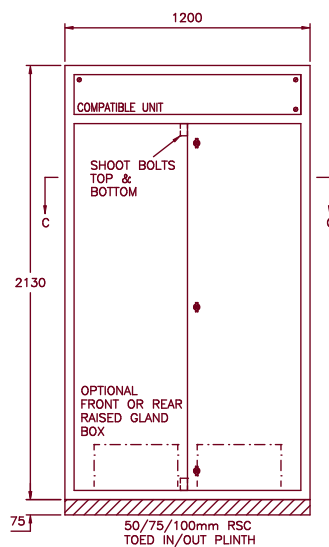


SECTION B-B

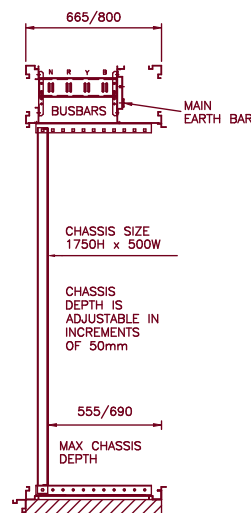


SIDE VIEW

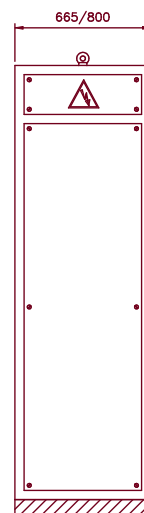


SECTION A-A




SECTION A-A (OPTION)



PLAN VIEW




SECTION C-C

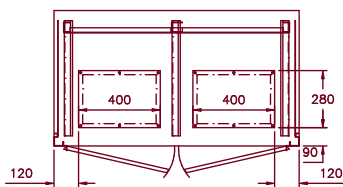

CHASSIS AT REAR

SECTION C-C (OPTION)

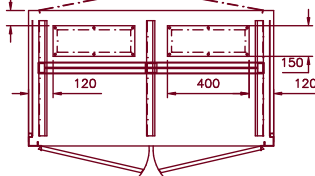

BACK-TO-BACK CHASSIS & REAR HINGED DOOR

SPECIFICATION

EN60439-1:1994
 MATERIAL: ZINTEC SHEET STEEL TO BS EN 10152:1994
 SEGREGATION: FORM 4
 INGRESS PROTECTION: I.P. 54
 CONSTRUCTION: WELDED OUTER FRAME UNITS, DISHED COVERS & DOORS WITH FULLY WELDED CORNERS & EARTH STUD.
 PLINTH: ROLLED STEEL CHANNEL
 PAINT FINISH: ANY STOCK BS4800 OR RAL SEMI GLOSS
 INTERNAL COLOUR AS EXTERNAL COLOUR

Rolla

Atlas Mill Road, Brighouse
 West Yorkshire, England, HD6 1ET
 Telephone: (01484) 710226
 Fax: (01484) 718608
 Email - sales@rolla.co.uk
 Website - www.rolla.co.uk



TITLE

MCC
 COMPATIBLE UNIT
 DATA SHEET

DRAWN	DATE	DRAWING NUMBER
ML	MAY 2002	KATTA 011